

PS2501-1X, PS2501-2X, PS2501-4X  
 PS2501-1, PS2501-2, PS2501-4



**HIGH DENSITY MOUNTING  
 PHOTOTRANSISTOR  
 OPTICALLY COUPLED ISOLATORS**

**APPROVALS**

- UL recognised, File No. E91231

**'X' SPECIFICATION APPROVALS**

- VDE 0884 pending
- Certified to EN60950 by the following Test Bodies :-  
 Nemko - Certificate No. P96102022  
 Fimko - Registration No. 192313-01..25  
 Semko - Reference No. 9639052 01  
 Demko - Reference No. 305969

**DESCRIPTION**

The PS2501-1, PS2501-2, PS2501-4 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photo transistors in space efficient dual in line plastic packages.


**FEATURES**

- Options :-  
 10mm lead spread - add G after part no.  
 Surface mount - add SM after part no.  
 Tape&reel - add SMT&R after part no.
- High Current Transfer Ratio ( 80% min)
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- High BV<sub>CEO</sub> ( 80Vmin )
- All electrical parameters 100% tested
- Custom electrical selections available


**APPLICATIONS**

- Computer terminals
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances


**OPTIONSM  
 SURFACEMOUNT**






**OPTIONG**







**PS2501-1X  
 PS2501-1**







**Dimensions in mm**



**PS2501-2X  
 PS2501-2**

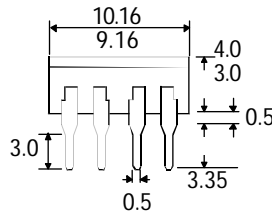

**PS2501-4X  
 PS2501-4**

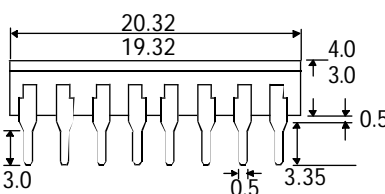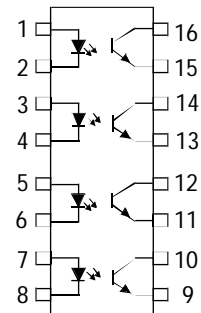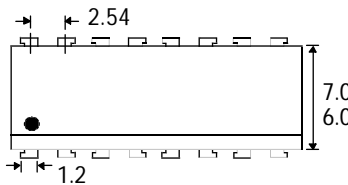

**ISOCOM COMPONENTS LTD**

Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, Cleveland, TS25 1YD  
 Tel: (01429) 863609 Fax : (01429) 863581

**ISOCOM INC**

720 E., Park Boulevard, Suite 104,  
 Plano, TX 75074 USA  
 Tel: (972) 423-5521  
 Fax: (972) 422-4549

**ABSOLUTE MAXIMUM RATINGS**  
(25°C unless otherwise specified)

Storage Temperature	_____	-55°C to + 125°C
Operating Temperature	_____	-55°C to + 100°C
Lead Soldering Temperature	(1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUT DIODE**

Forward Current	_____	50mA
Reverse Voltage	_____	6V
Power Dissipation	_____	70mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage $BV_{CEO}$	_____	80V
Emitter-collector Voltage $BV_{ECO}$	_____	6V
Power Dissipation	_____	150mW

**POWER DISSIPATION**

Total Power Dissipation	_____	200mW
(derate linearly 2.67mW/°C above 25°C)		


**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ )		1.2	1.4	V	$I_F = 20\text{mA}$ $I_R = 5\mu\text{A}$ $V_R = 5\text{V}$
	Reverse Voltage ( $V_R$ )	5			V	
	Reverse Current ( $I_R$ )			5	$\mu\text{A}$	
Output	Collector-emitter Breakdown ( $BV_{CEO}$ ) ( Note 2 )	80			V	$I_C = 1\text{mA}$ $I_E = 100\mu\text{A}$ $V_{CE} = 40\text{V}$
	Emitter-collector Breakdown ( $BV_{ECO}$ )	6			V	
	Collector-emitter Dark Current ( $I_{CEO}$ )			100	nA	
Coupled	Current Transfer Ratio (CTR) (Note 2) PS2501-1,PS2501-2,PS2501-4	80		600	%	$5\text{mA } I_F, 5\text{V } V_{CE}$
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$			0.3	V	$10\text{mA } I_F, 2\text{mA } I_C$
	Input to Output Isolation Voltage $V_{ISO}$	5300 7500			$V_{RMS}$ $V_{PK}$	See note 1 See note 1
	Input-output Isolation Resistance $R_{ISO}$	$5 \times 10^{10}$			$\Omega$	$V_{IO} = 500\text{V}$ (note 1)
	Output Rise Time $t_r$		4		$\mu\text{s}$	$V_{CE} = 2\text{V}$ , $I_C = 2\text{mA}, R_L = 100\Omega$
Output Fall Time $t_f$		3		$\mu\text{s}$		


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


**Collector Power Dissipation vs. Ambient Temperature**

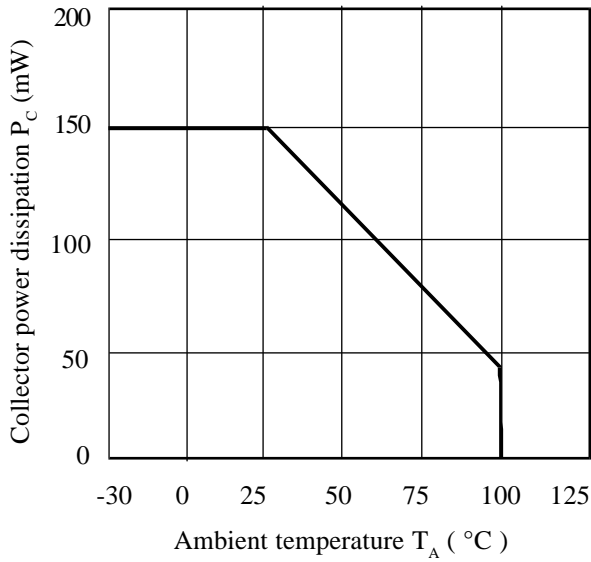


**Collector-emitter Saturation Voltage vs. Forward Current**

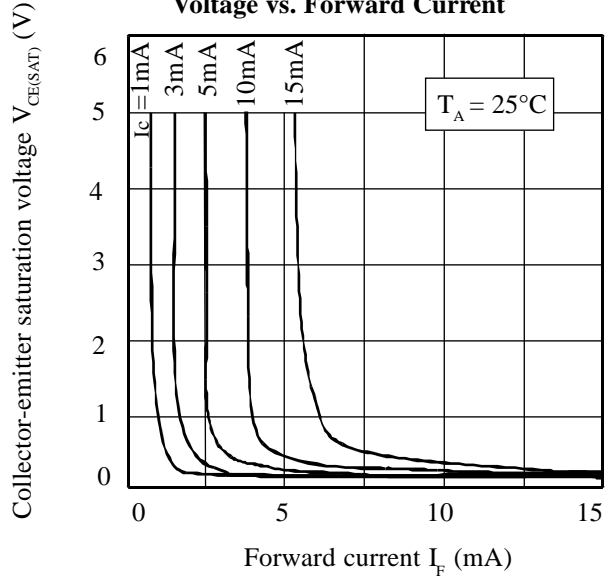


**Forward Current vs. Ambient Temperature**

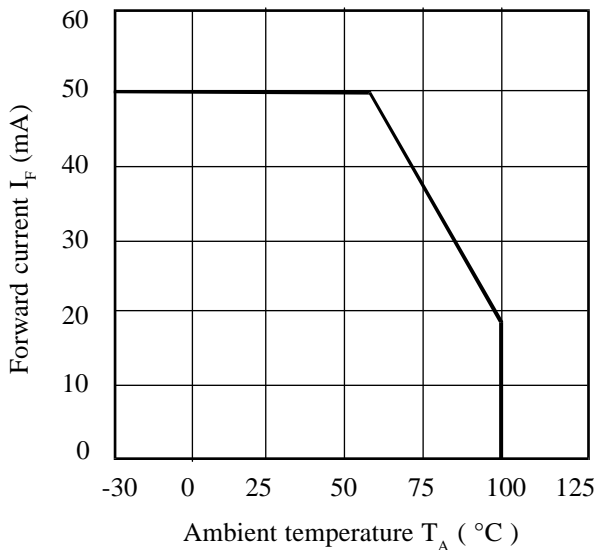

**Collector Current vs. Collector-emitter Voltage**

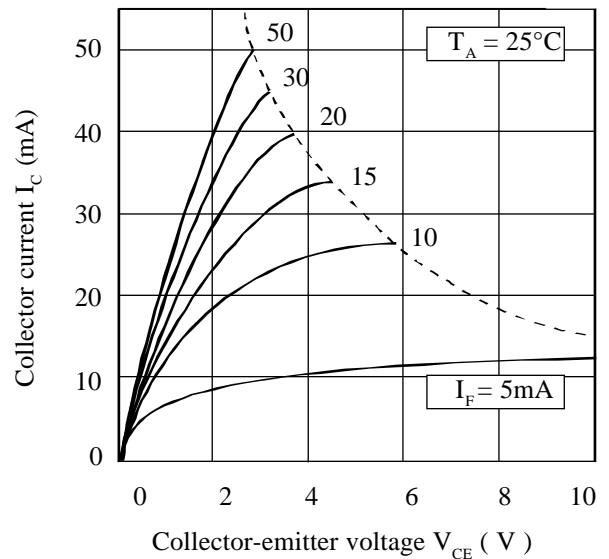

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

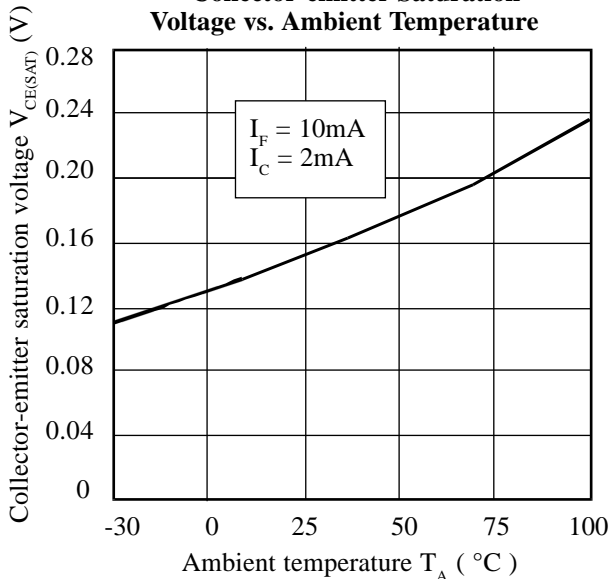

**Current Transfer Ratio vs. Forward Current**

